



W-DMX BlackBox

Indoor series transmitters

S-1

S-2

T-1 Pro

The W-DMX BlackBox range represents the pinnacle of wireless engineering excellence applied to the control of lighting systems.

In common with all W-DMX BlackBox products, the indoor series transmitters offer simple setup and reliable operation. Minimal cabling requirements and multiple power input options ensure that the transmitters can be easily incorporated into new and existing installations. The initial configuration procedure couldn't be simpler. Just one press of the front panel button is all that's required to search for, and link with unallocated receivers. That's it. Operation can then begin immediately to control any fixtures that are DMX cabled to the receivers.

There are three main transmitter options within the indoor series to suit your exact requirements:

S-1 Single DMX universe transmitter.

S-2 Dual DMX universe transmitter.

T-1 Pro Single DMX universe transceiver with internal battery backup to provide up to two hours operation without power input. T-1 Pro units can be switched between transmitter and receiver modes as required. Two T-1 Pro units (one in each mode) can be wired together to create a signal repeater to extend transmission distances even further.

All units are delivered with a multi purpose bracket for easy mounting and rigging as well as a standard 2 dBi rubber whip antenna. A multitude of other antennae options are available to increase the standard transmission range of 700m (2300 feet) to an incredible 2300m (7550 feet). All indoor series transmitters use the licence free 2.45GHz ISM band and are specifically certified for use in the United States, Canada, Japan and all European Union countries. The efficient automated anti-interference techniques employed provide another distinct advantage. In order to send multiple DMX universes, you can place numerous BlackBox transmitters in close proximity without harming transmission signals - a real advantage for large, distributed installations.

All indoor series transmitters are housed within tough diecast aluminium casings which are suitable for both indoor and fair weather outdoor operation.




What is W-DMX™?

The W-DMX™ technology lies at the heart of every one of our BlackBox products. W-DMX™ is specifically engineered by Wireless Solution Sweden AB to provide the same quality, reliability and performance as any hardwired DMX data link. In fact W-DMX™ gives you greater freedom to create reliable point-to-point, point-to-multipoint and even multipoint-to-multipoint installations over large distances.

Point-to-point operation



Multipoint-to-multipoint operation

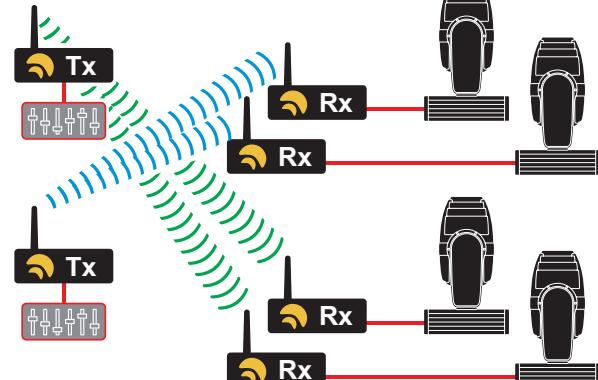

W-DMX™ is unique in its use of certain advanced radio techniques which are more often found in mobile phone and military communications. Rather than using fixed frequency channels, W-DMX™ uses adaptive frequency hopping technology (as well as TDMA and GFSK techniques) to continually check for interference and to rapidly move operation over to clear radio channels. The frequency hops occur one thousand times every second to ensure smooth, efficient and robust operation.

The advantage of such technology will quickly become clear to you: consistent and wide ranging control of your lighting systems over potentially great distances.



wireless
solution

Specifications

DMX interface

- Full compliance with USITT DMX-512 (1990) & 512-A standards
- Maximum number of transceivers on a single bus: 32 (compliant with the EIA/TIA RS-485 standard)
- Data Rate: 250 kbps (slew rate limited to minimise EMI)
- Electrostatic discharge protection: $\pm 15\text{kV}$
- DMX frame rate and frame size: Auto sensing
- Frame rate: 1 (min) to 44 (max) frames per second
- Frame size: 1 (min) to 512 (max) channels
- Loss of DMX input or radio link: After one second (if there is no resumption), the DMX output will cease to transmit and go into a high impedance mode.
- Recovery from loss of DMX input or radio link: Less than 1 second.

Power characteristics

- High voltage input: 90-260VAC
- Low voltage input: 12VDC (T-1 Pro and S-2: 12-24VDC)
- Average current (transmit mode): 450mA @ 12VDC
- Average current (T-1 receive mode): 200mA @12VDC

Battery operation (T-1 Pro only)

- 1 hour operation from fully charged in transmit mode
- 2 hours operation from fully charged in receive mode

RF characteristics

W-DMX™ uses Adaptive Frequency Hopping Spread Spectrum (AFHSS) and changes frequency every 910uS

- Operational frequency range: 2402-2479MHz (ISM band)
- EU/ASIA RF output power: 20dBm or 100mW
- FCC RF output power: 25dBm or 275mW
- Channel bandwidth: 1 MHz
- Sensitivity at 0.1% Packet Error Rate: 95dBm
- Tested link range 450m (Low power EU mode using standard antennae in an urban area)

Approvals

- FCC: 15.247&68 Class B; Canada ICES 003; Japan ARIB STD-T66
- CE; EN 301 489-1; 301 489-17; EN 300-328-1; EN 300-328-2; EN 609 50

Enclosure

- Diecast aluminium casing
- Operating temp range: S-1 / S-2: 0°C to +55°C (32°F to 131°F)
T-1 Pro: -20°C to +55°C (-4°F to 131°F)
- Dimensions (W x H x D): 219 x 45 x 131mm (8.6" x 1.8" x 5.2")
- Weight: 1005g / 35.45oz

Connectors

- N-type female antenna connector, N – RP-SMA adaptor included
- 2 Neutrik® XLR 5-pin gold plated DMX connectors
- 2 RJ45, DMX over Cat5 cable links
- 1 RJ45, W-DMX PC-link / Internal link (T-1 Pro only)
- 1 DC input, pluggable terminal strip, Phonix® MSTB 2,5
- 1 AC input, IEC-6C

Supplied accessories

- AC power cord / DC power connector / Standard antenna
Antenna adaptor / Mounting brackets / User guide

Part codes

	S-1	S-2	T-1 Pro
ETSI/FCC approved (power output: 100mW/275mW max.)	A40001	A40005	A40003
Japan ARIB approved (power output: 100mW max.)	A40001J	A40005J	A40003J

Release 1-1d (October 2007) Specifications subject to change without notice

Front and rear panel details

